INVISION SECONDARY GLAZING

Hinged Unit (HU).

With 60mm sightlines and no transoms or mullions, our hinged units offer an unobstructed view beyond the window. The unit features single handle operation and multi-point locking. Side and base opening also available.

Features

- Slim, unobtrusive aluminium profile
- · Easy opening due to internal gearing
- · Multi-point locking for enhanced security
- Improved noise and thermal installation
- Suitable to have bevelled timber subframe to fix into bays/splayed reveals
- Can be coupled or stacked with other traditional units in the range to treat large areas of glazing or long runs of windows
- Can be supplied with restrictors


Specification

- · Glazing options: 4mm in our Classic range
- Glazing options: 6mm 10.8mm in our Enhanced range
- 28mm DGU also available as part of our Enhanced range
- Choice of timber subframes
- Pre-drilled and countersunk for face fix and reveal fix through timber. Reveal fix through aluminum is selfdrilled
- · Q-Lon seal to front, woolpile seal to back
- Gasket colour white as standard, black also available upon request
- PVCu trims supplied for the face of the units to create a neat, clean finish
- Standard colour 9003 Satin White

Variations of Basic Unit

- Various handle options (locking Espag as standard)
- Butt hinges as standard for 180° opening. Egress hinge also available
- Invisi-hinges available on all Hinged Unit variations barring Slimline Hinged Unit
- · Standard and acoustic trickle vents are available
- No subframe version available
- Can be coupled and stacked using a heavy duty frame coupling section or timber to timber
- LH, RH, top or bottom orientation
- Variety of stock colours available, including all RAL options



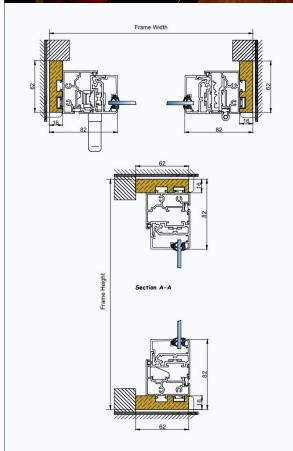





Optimum Noise Reduction: 52dB (Rw)

Using 6mm toughened primary glazing and 6.8mm acoustic laminate secondary glazing.



Optimum U Value: 1.5 W/m2K

Using 4mm toughened Low E glazing, with 80mm glass-to-glass